


CB-8000 Resin Monitor

Manual

This manual is applicable to the following models:

- CB-8000-APS
- CB-8000-UPS
- CB-8000-PAT

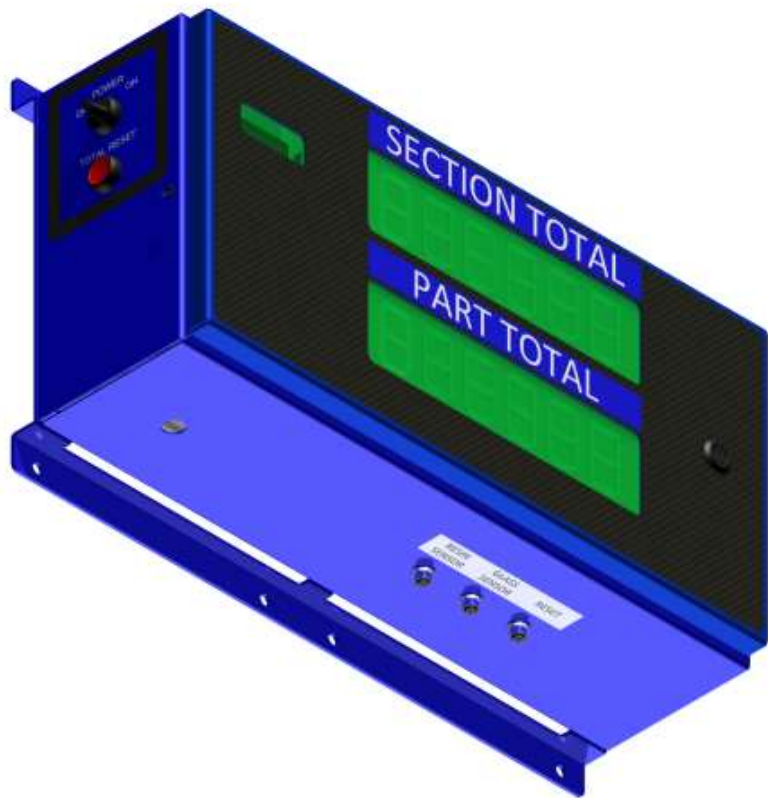

Rev. March 2019



CORPORATE HEADQUARTERS

2030 Falling Waters Rd, Suite 350, Knoxville, TN 37922 · USA · Tel: (865) 686-5670

DISTRIBUTION AND PURCHASING

642 Barbrow Ln, Knoxville, TN 37932 · USA · Tel: (865) 684-4416

TECHNOLOGY CENTER AND MANUFACTURING

1862 Ives Ave, Kent, WA 98032 · USA · Tel (253) 854-2660 · Fax (253) 854-1666

E-mail: info@mvpind.com

For a list of international distributors, visit our website at :

www.mvpind.com/mvp-international

Use of this product confirms that Magnum Venus Products, Inc.'s standard terms and conditions of sale apply.



Table of Contents

Section	Page
• Table of Contents	3
• Safety & Warning Information	4
• Introduction	15
• Installing the Unit	16
• Programming	16
• Calibrating	19
• Troubleshooting	20
• Parts Information	20

Safety & Warning Information

Warnings

Due to the vast number of chemicals that could be used and their varying chemical reactions, the buyer and user of this equipment should determine all factors relating to the fluids used, including any of the potential hazards involved. Particular inquiry and investigation should be made into potential dangers relating to toxic fumes, fires, explosions, reaction times, and exposure of human beings to the individual components or their resultant mixtures. MVP assumes no responsibility for loss, damage, expense or claims for bodily injury or property damage, direct or consequential, arising from the use of such chemical components.

The end user is responsible for ensuring that the end product or system complies with all the relevant laws in the country where it is to be used and that all documentation is adhered to.

Recommended Occupational Safety & Health Act (OSHA) Documentation:

- 1910.94 Pertaining to ventilation
- 1910.106 Pertaining to flammable liquids
- 1910.107 Pertaining to spray finishing operations, particularly paragraph (m), Organic Peroxides and Dual Component Coatings

For Additional information, contact the Occupational Safety and Health Administration (OSHA) at <https://www.osha.gov/about.html>.

Recommended National Fire Protection Association (NFPA) Documentation:

- NFPA No.33 Chapter 14 Organic Peroxides and Dual Component Materials
- NFPA No. 63 Dust Explosion Prevention
- NFPA No. 70 National Electrical Code
- NFPA No. 77 Static Electricity
- NFPA No. 91 Blower and Exhaust System
- NFPA No. 654 Plastics Industry Dust Hazards

Fire Extinguisher – code ABC, rating number 4a60bc using Extinguishing Media –Foam, Carbon Dioxide, Dry Chemical, Water Fog, is recommended for this product and applications.

The following general warnings and guidelines are for the setup, use, grounding, maintenance, and repair of equipment. Additional product-specific warnings may be found throughout this manual as applicable. Please contact your nearest MVP Technical Service Representative if additional information is needed.


Safety Precautions

- Avoid skin contact and inhalation of all chemicals.
- Review Material Safety Data Sheet (MSDS) to promote the safe handling of chemicals in use.
- Restrict the use of all chemicals to designated areas with good ventilation.
- Chemicals are flammable and reactive.
- Noxious fumes released when combusted.
- Operate equipment in a ventilated environment only.
- Uncured liquid resins are highly flammable unless specifically labeled otherwise.
- Cured laminate, accumulations of overspray, and laminate sandings are highly combustible.
- Do not operate or move electrical equipment when flammable fumes are present.
- Ground all equipment.
- If a spark is seen or felt, immediately halt operation. Do not operate the equipment until the issue has been identified and repaired.
- Contaminated catalyst may cause fire or explosion.
- Containers may explode if exposed to fire / heat.
- Use and store chemicals away from heat, flames, and sparks.
- Do not smoke in work areas or near stored chemicals.
- Do not mix Methyl Ethyl Ketone Peroxide (MEKP) with materials other than polyethylene.
- Do not dilute MEKP.
- Keep food and drink away from work area.



Physical Hazards

- Never look directly into the spray gun fluid tip. Serious injury or death can result.
- Never aim the spray gun at or near another person. Serious injury or death can result.
- Chemical compounds can be severely irritating to the eyes and skin.
- Inhalation, ingestion, or injection may damage internal organs and lead to pulmonary disorders, cancers, lymphomas, and other diseases or health conditions.
- Other potential health effects include: irritation of the eyes and upper respiratory tract, headache, light-headedness, dizziness, confusion, drowsiness, nausea, vomiting, and occasionally abdominal pain.
- Eye contact: Immediately flush with water for at least 15 minutes and seek immediate medical attention.
- Skin Contact: Immediately wash with soap and water and seek immediate medical attention.
- Inhalation: Move the person to fresh air and seek immediate medical attention.
- Do not remove shields, covers, or safety features on equipment that is in use.
- Never place fingers, hands, or any body part near or directly in front of the spray gun fluid tip. The force of the liquid as it exits the spray tip can shoot liquid through the skin.
- Keep hands and body parts away from any moving equipment or components.
- Do not stand under plunger
- An improperly loaded drum may lead to an imbalance, causing a unit to tip over

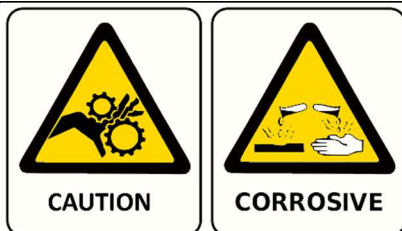

Personal Protective Equipment (PPE)

- MVP recommends the use of personal safety equipment with all products in our catalog.
- Wear safety goggles, hearing protection, a respirator, and chemical resistant gloves.
- Wear long sleeve shirts or jackets and pants to minimize skin exposure.
- PPE should be worn by operators and service technicians to reduce the risk of injury.



For Additional information, contact the Occupational Safety and Health Administration (OSHA). <https://www.osha.gov/about.html>

Symbol Definitions



Indicates the risk of contact with chemicals that are hazardous, which may lead to injury or death.



Indicates the risk of contact with voltage / amperage that may lead to serious injury or death



Indicates that the materials being used are susceptible to combustion



Indicates the risk of contact with moving components that may lead to serious injury or death.



Indicates that the system or component should be grounded before proceeding with use or repair.



Indicates the use of lit cigarettes or cigars is prohibited, because the materials being used are susceptible to combustion.



Indicates that the materials and/or the process being performed can lead to ignition and explosion.



A recommendation for the use of Personal Protective Equipment (PPE) before using or repairing the product.

Polymer Matrix Materials: Advanced Composites

Potential health hazards associated with the use of advanced composites can be controlled through the implementation of an effective industrial hygiene and safety program.

https://www.osha.gov/dts/osta/otm/otm_iii/otm_iii_1.html#t_iii:1_1

Resins		
Composite Component	Organ System Target (Possible Target)	Known (Possible) Health Effect
Epoxy resins	Skin, lungs, eyes	Contact and allergic dermatitis, conjunctivitis
Polyurethane resins	Lungs, skin, eyes	Respiratory sensitization, contact dermatitis, conjunctivitis
Phenol formaldehyde	Skin, lungs, eyes	As above (potential carcinogen)
Bismaleimides (BMI)	Skin, lungs, eyes	As above (potential carcinogen)
Polyamides	Skin, lungs, eyes	As above (potential carcinogen)
Reinforcing materials		
Composite Component	Organ System Target (Possible Target)	Known (Possible) Health Effect
Aramid fibers	Skin (lungs)	Skin and respiratory irritation, contact dermatitis (chronic interstitial lung disease)
Carbon/graphite fibers	Skin (lungs)	As noted for aramid fibers
Glass fibers (continuous filament)	Skin (lungs)	As noted for aramid fibers
Hardeners and curing agents		
Composite Component	Organ System Target (Possible Target)	Known (Possible) Health Effect
Diaminodiphenylsulfone	N/A	No known effects with workplace exposure
Methylenedianiline	Liver, skin	Hepatotoxicity, suspect human carcinogen
Other aromatic amines		
Composite Component	Organ System Target (Possible Target)	Known (Possible) Health Effect
Meta-phenylenediamine (MPDA)	Liver, skin (kidney, bladder)	Hepatitis, contact dermatitis (kidney and bladder cancer)
Aliphatic and cyclo-aliphatic amines	Eyes, skin	Severe irritation, contact dermatitis
Polyaminoamide	Eyes, skin	Irritation (sensitization)
Anhydride	Eyes, lungs, skin	Severe eye and skin irritation, respiratory sensitization, contact dermatitis

Catalyst - Methyl Ethyl Ketone Peroxide (MEKP)

MEKP is among the more hazardous materials found in commercial channels. The safe handling of the “unstable (reactive)” chemicals presents a definite challenge to the plastics industry. The highly reactive property which makes MEKP valuable to the plastics industry in producing the curing reaction of polyester resins also produces the hazards which require great care and caution in its storage, transportation, handling, processing and disposal. MEKP is a single chemical. Various polymeric forms may exist which are more or less hazardous with respect to each other. These differences may arise not only from different molecular structures (all are, nevertheless, called “MEKP”) and from possible trace impurities left from the manufacture of the chemicals, but may also arise by contamination of MEKP with other materials in its storage or use. Even a small amount of contamination with acetone, for instance, may produce an extremely shock-sensitive and explosive compound.



WARNING

Contamination with promoters, materials containing promoters (such as laminate sandings), or with any readily oxidizing material (such as brass or iron) will cause exothermic redox reactions which can be explosive in nature. Heat applied to MEKP or heat buildup from contamination reactions can cause the material to reach its Self-Accelerating Decomposition Temperature (SADT).

Researchers have reported measuring pressure rates-of-rise well over 100,000 psi per second when certain MEKP's reach their SADT. For comparison, the highest-pressure rate-of-rise listed in NFPA Bulletin NO.68, “Explosion Venting”, is 12,000 psi per second for an explosion of 12% acetylene and air. The maximum value listed for a hydrogen explosion is 10,000 psi per second. Some forms of MEKP, if allowed to reach their SADT, will burst even an open topped container. This suggests that it is not possible to design a relief valve to vent this order of magnitude of pressure rate-of-rise. The user should be aware that any closed container, be it a pressure vessel, surge chamber, or pressure accumulator, could explode under certain conditions. There is no engineering substitute for care by the user in handling organic peroxide catalysts. If, at any time, the pressure relieve valve on top of the catalyst tank should vent, the area should be evacuated at once and the fire department called. The venting could be the first indication of a heat, and therefore, pressure build-up that could eventually lead to an explosion. Moreover, if a catalyst tank is sufficiently full when the pressure relief valve vents, some catalyst may spray out, which could cause eye injury. For this reason, and many others, anyone whose job puts them in an area where this vented spray might go, should always wear full eye protection even when laminating operations are not taking place.

Safety in handling MEKP depends to a great extent on employee education, proper safety instructions, and safe use of the chemicals and equipment. Workers should be thoroughly informed of the hazards that may result from improper handling of MEKP, especially regarding contamination, heat, friction and impact. They should be thoroughly instructed regarding the proper action to be taken in the storage, use, and disposal of MEKP and other hazardous materials used in the laminating operation. In addition, users should make every effort to:

- Store MEKP in a cool, dry place in original containers away from direct sunlight and away from other chemicals.
- Keep MEKP away from heat, sparks, and open flames.
- Prevent contamination or MEKP with other materials, including polyester over spray and sandings, polymerization accelerators and promoters, brass, aluminum, and non-stainless steels.

- Never add MEKP to anything that is hot, since explosive decomposition may result.
- Avoid contact with skin, eyes, and clothing. Protective equipment should be worn at all times. During clean-up of spilled MEKP, personal safety equipment, gloves, and eye protection must be worn. Firefighting equipment should be at hand and ready.
- Avoid spillage, which can heat up to the point of self-ignition.
- Repair any leaks discovered in the catalyst system immediately, and clean-up the leaked catalyst at once in accordance with the catalyst manufacturer's instructions.
- Use only original equipment or equivalent parts from Magnum Venus Products in the catalyst system (i.e.: hoses, fitting, etc.) because a dangerous chemical reaction may result between substituted parts and MEKP.
- Catalyst accumulated from the purging of hoses or the measurement of fluid output deliveries should never be returned to the supply tank, such catalyst should be diluted with copious quantities of clean water and disposed of in accordance with the catalyst manufacturer's instructions.

The extent to which the user is successful in accomplishing these ends and any additional recommendations by the catalyst manufacturer determines largely the safety that will be present in his operation.

Clean-Up Solvents and Resin Diluents



WARNING

A hazardous situation may be present in your pressurized fluid system! Hydro carbon solvents can cause an explosion when used with aluminum or galvanized components in a closed (pressurized) fluid system (pump, heaters, filters, valves, spray guns, tanks, etc.). An explosion could cause serious injury, death, and/or substantial property damage. Cleaning agents, coatings, paints, etc. may contain Halogenated Hydrocarbon solvents. Some Magnum Venus Products spray equipment includes aluminum or galvanized components and will be affected by Halogenated Hydrocarbon solvents.

There are three key elements to the Halogenated Hydrocarbon (HHC) solvent hazard.

- | | |
|--|--|
| 1. The presence of HHC solvents. | 1,1,1 – Trichloroethane and Methylene Chloride are the most common of these solvents. However, other HHC solvents are suspect if used; either as part of paint or adhesives formulation, or for clean-up flushing. |
| 2. Aluminum or Galvanized Parts. | Most handling equipment contains these elements. In contact with these metals, HHC solvents could generate a corrosive reaction of a catalytic nature. |
| 3. Equipment capable of withstanding pressure. | When HHC solvent contact aluminum or galvanized parts inside a closed container such as a pump, spray gun, or fluid handling system, the chemical reaction can, over time, result in a build-up of heat and pressure, which can reach explosive proportions. When all three elements are present, the result can be an extremely violent explosion. The reaction can be sustained with very little aluminum or galvanized metal; any amount of aluminum is too much. |

- The reaction is unpredictable. Prior use of an HHC solvent without incident (corrosion or explosion) does NOT mean that such use is safe. These solvents can be dangerous alone (as a clean-up or flushing agent) or when used as a component or a coating material. There is no known inhibitor that is effective under all circumstances. Mixing HHC solvents with other materials or solvents such as MEKP, alcohol, or toluene may render the inhibitors ineffective.
- The use of reclaimed solvents is particularly hazardous. Reclaimers may not add any inhibitors. The possible presence of water in reclaimed solvents could also feed the reaction.
- Anodized or other oxide coatings cannot be relied upon to prevent the explosive reaction. Such coatings can be worn, cracked, scratched, or too thin to prevent contact. There is no known way to make oxide coatings or to employ aluminum alloys to safely prevent the chemical reaction under all circumstances.
- Several solvent suppliers have recently begun promoting HHC solvents for use in coating systems. The increasing use of HHC solvents is increasing the risk. Because of their exemption from many state implementation plans as Volatile Organic Compounds (VOCs), their low flammability hazard, and their not being classified as toxic or carcinogenic substances, HHC solvents are very desirable in many respects.



WARNING

Do not use Halogenated Hydrocarbon (HHC) solvents in pressurized fluid systems having aluminum or galvanized wetted parts.

Magnum Venus Products is aware of NO stabilizers available to prevent HHC solvents from reaction under all conditions with aluminum components in closed fluid systems. HHC solvents are dangerous when used with aluminum components in a closed fluid system.

- Consult your material supplier to determine whether your solvent or coating contains Halogenated Hydrocarbon solvents.
- Magnum Venus Products recommends that you contact your solvent supplier regarding the best non-flammable clean-up solvent with the heat toxicity for your application.
- If, however, you find it necessary to use flammable solvents, they must be kept in approved, electrically grounded containers.
- Bulk solvent should be stored in a well-ventilated, separate building, 50 feet away from your main plant.
- You should only allow enough solvent for one day's use in your laminating area.
- NO SMOKING signs must be posted and observed in all areas of storage or where solvents and other flammable materials are used.
- Adequate ventilation (as covered in OSHA Section 1910.94 and NFPA No.91) is important wherever solvents are stored or used, to minimize, confine and exhaust the solvent vapors.
- Solvents should be handled in accordance with OSHA Section 1910.106 and 1910.107.

Catalyst Diluents

Magnum Venus Products spray-up and gel-coat systems currently produced are designed so that catalyst diluents are not required. Magnum Venus Products therefore recommends that diluents not be used to avoid possible contamination which could lead to an explosion due to the handling and mixing of MEKP and diluents. In addition, it eliminates any problems from the diluent being contaminated through rust particles in drums, poor quality control on the part of the diluents suppliers, or any other reason. If diluents are absolutely required, contact your catalyst supplier and follow his instructions explicitly. Preferably the supplier should premix the catalyst to prevent possible “on the job” contamination while mixing.



WARNING

If diluents are not used, remember that catalyst spillage and gun, hose, and packing leaks are potentially more hazardous since each drop contains a higher concentration of catalyst and will therefore react more quickly with overspray and the leak.

Cured Laminate, Overspray and Laminate Sandings Accumulation

- Remove all accumulations of overspray, Fiberglass Reinforced Plastic (FRP) sandings, etc. from the building as they occur. If this waste is allowed to build up, spillage of catalyst is more likely to start a fire; in addition, the fire would burn hotter and longer.
- Floor coverings, if used, should be non-combustible.
- Spilled or leaked catalyst may cause a fire if it comes in contact with an FRP product, oversprayed chop or resin, FRP sandings or any other material with MEKP.

To prevent spillage and leakage, you should:

- | | |
|--|---|
| 1. Maintain your Magnum Venus Products System. | Check the gun several times daily for catalyst and resin packing or valve leaks. REPAIR ALL LEAKS IMMEDIATELY. |
| 2. Never leave the gun hanging over or lying inside the mold. | A catalyst leak in this situation would certainly damage the part, possibly the mold, and may cause a fire. |
| 3. Inspect resin and catalyst hoses daily for wear or stress at the entry and exits of the boom sections and at the hose and fittings. | Replace if wear or weakness is evident or suspected. |
| 4. Arrange the hoses and fiberglass roving guides so that the fiberglass strands DO NOT rub against any of the hoses at any point. | If allowed to rub, the hose will be cut through, causing a hazardous leakage of material which could increase the danger of fire. Also, the material may spew onto personnel in the area. |

Toxicity of Chemicals

- Magnum Venus Products recommends that you consult OSHA Sections 1910.94, 1910.106, 1910.107 and NFPA No.33, Chapter 14, and NFPA No.91.
- Contact your chemical supplier(s) and determine the toxicity of the various chemicals used as well as the best methods to prevent injury, irritation and danger to personnel.
- Also determine the best methods of first aid treatment for each chemical used in your plant.

Equipment Safety

Magnum Venus Products suggest that personal safety equipment such as EYE GOGGLES, GLOVES, EAR PROTECTION, and RESPIRATORS be worn when servicing or operating this equipment. Ear protection should be worn when operating a fiberglass chopper to protect against hearing loss since noise levels can be as high as 116 dB (decibels). This equipment should only be operated or serviced by technically trained personnel!



CAUTION

Never place fingers, hands, or any body part near or directly in front of the spray gun fluid tip. The force of the liquid as it exits the spray tip can cause serious injury by shooting liquid through the skin. NEVER LOOK DIRECTLY INTO THE GUN SPRAY TIP OR POINT THE GUN AT OR NEAR ANOTHER PERSON OR AN ANIMAL.



DANGER

Contaminated catalyst may cause fire or explosion. Before working on the catalyst pump or catalyst accumulator, wash hands and tools thoroughly. Be sure work area is free from dirt, grease, or resin. Clean catalyst system components with clean water daily.



DANGER

Eye, skin, and respiration hazard. The catalyst MEKP may cause blindness, skin irritation, or breathing difficulty. Keep hands away from face. Keep food and drink away from work area.

Treatment of Chemical Injuries



CAUTION

Refer to your catalyst manufacturer's safety information regarding the safe handling and storage of catalyst. Wear appropriate safety equipment as recommended.

Great care should be used in handling the chemicals (resins, catalyst and solvents) used in polyester systems. Such chemicals should be treated as if they hurt your skin and eyes and as if they are poison to your body. For this reason, Magnum Venus Products recommends the use of protective clothing and eye wear in using polyester systems. However, users should be prepared in the event of such an injury.

Precautions include:

1. Know precisely what chemicals you are using and obtain information from your chemical supplier on what to do in the event the chemical gets onto your skin or into the eyes, or if swallowed.
2. Keep this information together and easily available so that it may be used by those administering first aid or treating the injured person.
3. Be sure the information from your chemical supplier includes instructions on how to treat any toxic effects the chemicals have.

**WARNING**

Contact your doctor immediately in the event of an injury. If the product's MSDS includes first aid instructions, administer first aid immediately after contacting a doctor.

Fast treatment of the outer skin and eyes that contact chemicals generally includes immediate and thorough washing of the exposed skin and immediate and continuous flushing of the eyes with lots of clean water for at least 15 minutes or more. These general instructions of first aid treatment may be incorrect for some chemicals; you must know the chemicals and treatment before an accident occurs. Treatment for swallowing a chemical frequently depends upon the nature of the chemical.

Emergency Stop Procedure

In an emergency, follow these steps to stop a system:

1. The ball valve located where the air enters the power head of the resin pump, should be moved to the “OFF” or closed position.

Note ***The “open” or “on” position is when the ball valve handle is parallel (in line) with the ball valve body. The “closed” or “off” position is when the ball valve handle is perpendicular (across) the ball valve body.***

2. Turn all system regulators to the “OFF” position (counter-clockwise) position.
3. Verify / secure the catalyst relief line, located on the catalyst relief valve.
4. Verify / secure the resin return line, located on the resin filter.
5. Place a container under the resin pump ball valve to catch ejected resin.
6. Locate the ball valve on the resin pump.
7. Rotate the ball valve 90 degrees to the “On” or open position.

Grounding

Grounding an object means providing an adequate path for the flow of the electrical charge from the object to the ground. An adequate path is one that permits charge to flow from the object fast enough that it will not accumulate to the extent that a spark can be formed. It is not possible to define exactly what will be an adequate path under all conditions since it depends on many variables. In any event, the grounding means should have the lowest possible electrical resistance.

Grounding straps should be installed on all loose conductive objects in the spraying area. This includes material containers and equipment. Magnum Venus Products recommends grounding straps be made of AWG No.18 stranded wire as a minimum and the larger wire be used where possible. NFPA Bulletin No77 states that the electrical resistance of such a leakage path may be as low as 1 meg ohm (10 ohms) but that resistance as high as 10,000 meg ohms will produce an adequate leakage path in some cases.

CAUTION



Whenever flammable or combustible liquids are transferred from one container to another, or from one container to the equipment, both containers or container and equipment shall be effectively bonded and grounded to dissipate static electricity. For further information, see National Fire Protection Association (NFPA) 77, titled “Recommended Practice on Static Electrical”. Refer especially to section 7-7 titled “Spray Application of Flammable and Combustible Materials”.

Introduction

This manual provides information for the operation, maintenance, and simple repair of the MVP CB-8000 Resin Monitor. The following procedures are included:

- Installation and programming instructions
- Parts information



Please read this manual carefully and retain for future reference. Follow the steps in the order given, otherwise you may damage the equipment or injure yourself.

The monitor is designed to help operators achieve resin weight targets. The unit uses an electro-mechanical sensor (either magnetic or proximity) to keep track of fractional pump strokes. The unit has triple displays with external resets on two large LED readouts.

- Display #1 is used to track certain areas of the part being fabricated. Coupled with a remote reset, the operator can quickly zero the counter at any time.
- Display #2 is used to total the resin usage for the entire part. This can be reset locally at the panel via push button. Optionally, this can also be configured for a glass counter.
- Display #3 (inside the panel) is used to keep track of total resin usage for a period of time. This can be reset inside the panel and can be locked out except for authorized personnel.

Note ***If the glass counter option is enabled, this display only keeps track of the resin total.***

The unit comes standard with a 50 foot remote reset and 25 foot sensor line. Extra lengths are available upon request.

Installing the Unit

The CB-8000 comes with hardware to mount the unit to a 2" column, which is standard for most MVP systems. It will mount to any flat surface that is suitable to hold the weight of the unit.

Refer to the label on the panel for proper electrical supply connections.



CAUTION

Because of the variety of electrical codes in various parts of the world, MVP does not supply main power connections to any of the material monitors mentioned in this manual. Electrical connections should be made by a qualified electrician per codes of the local jurisdiction.

Due to the sensitivity of the sensor cables, proper installation of the cables is very important. Cables must be kept as far away from electrical sources as possible to avoid interference with input signals. In some extreme instances, EMI filters may need to be installed to make the unit work properly.

The end user is responsible for ensuring that the product or system complies with all relevant laws in the country where it is to be used and that all general electrical practices are adhered to.


Programming

The CB-8000 basic functions are factory set to run out of the box. Only two adjustments need to be made to each panel meter to match up to the displacement of the fluid section it will be used with and to set the decimal point display.

The system uses Red Lion panel meter displays. The large display is LD2006P0 and the smaller display is a CUB5. To set the decimal point and scale factors, follow these steps:

Large Display

1. Use the PAR and SEL keys to navigate to and select Input Setup Parameters (1-InP) on the large display.

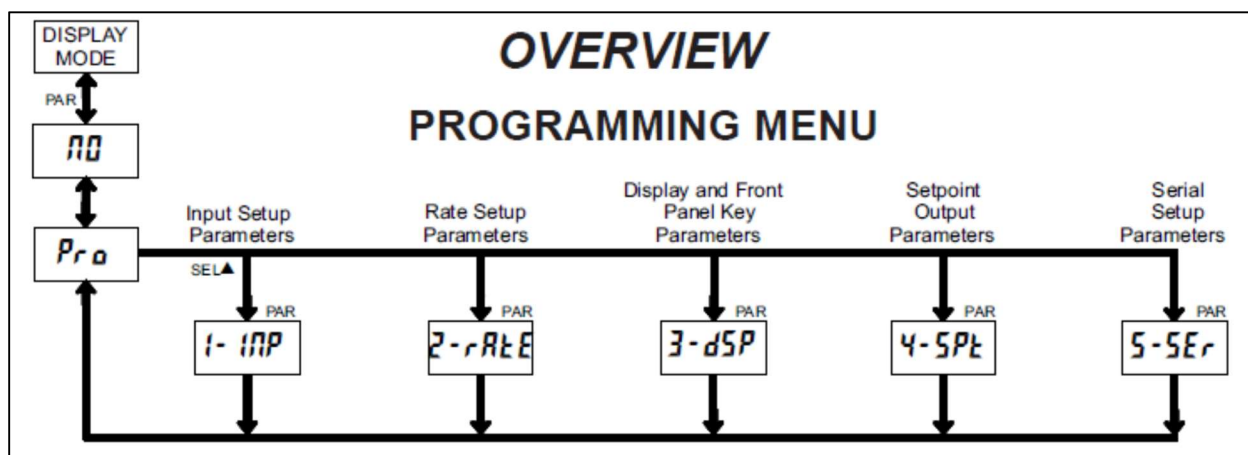

2. Press the PAR key.


Display will read Pro or No.

- Press the SEL key.

Display will read 1-InP.

- Press the PAR key to enter count mode.
- Press the PAR key again to enter decimal point setup.
- Press the SEL key if you wish to set the decimal point and use the RST key to set the number of decimals.

Note *MVP recommends no more than 2 decimal places.*

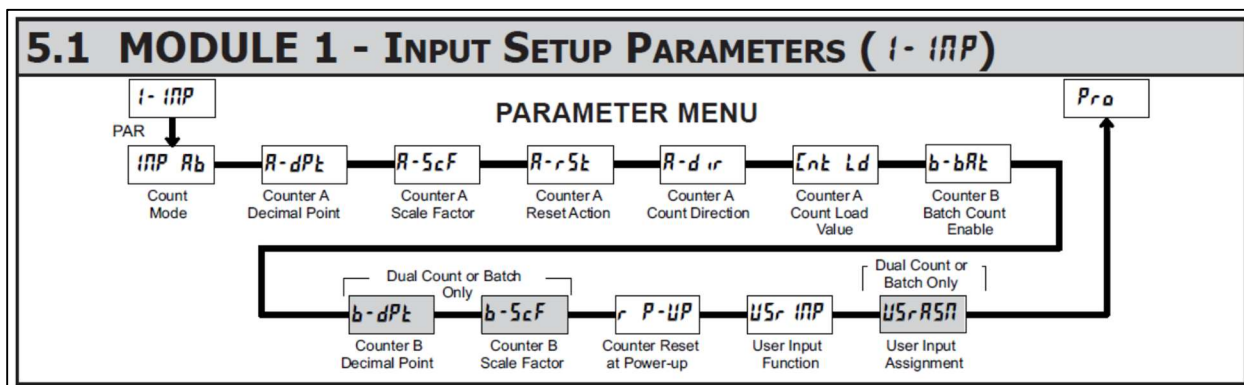

- Press the PAR key to move the scale factor parameter.
- Press the SEL key to set the scale factor.
- Use the RST key to move from number to number and the SEL key to adjust the number to 1.0000.

Note *This is to prepare the unit for calibration. If you already know your scale factor, enter that number.*

- Continue pressing the PAR key to cycle through the remaining modules (6 times) until the display reads Pro or No.


Note *You have access to other parameters in input setup, but it is best practice to leave the default settings according to the table below.*

Parameter	Display	Default Setting
Counter A Reset Action	A-rSt	ZEro
Counter A Count Direction	A-dir	NOr
Counter A Count Load Value	Cnt-Ld	50.00 Note <i>This setting has no bearing on this programming</i>
Counter B Batch Count Enable	b-bAt	NO
Counter Reset at Power-Up	P-UP	NO
User Input Function	Usr-INP	rESET

- Press PAR one more time to exit programming mode.


Small Display

1. Use the SEL and RST keys to navigate to and select Input Setup Parameters (1-InPUt) on the smaller display.

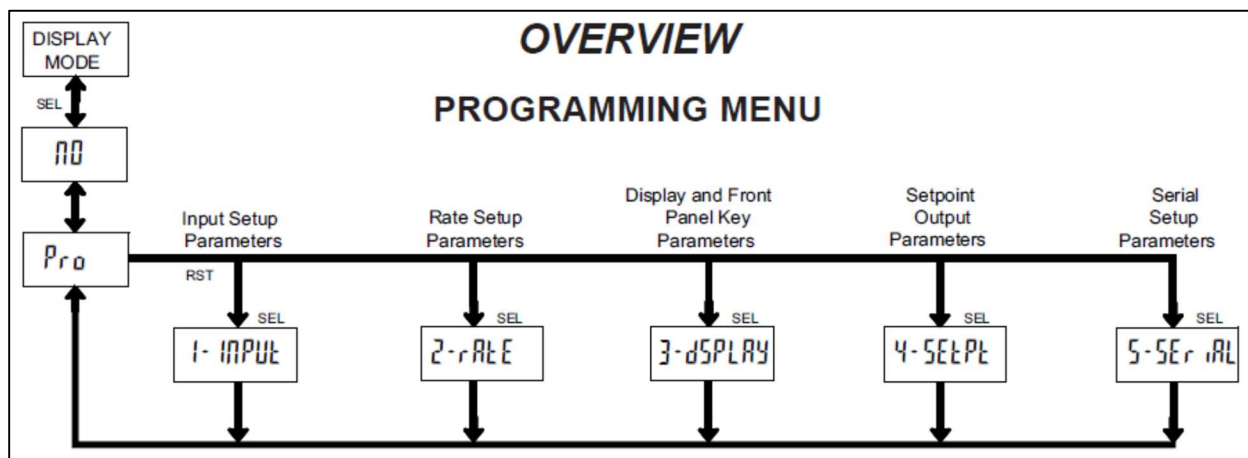

2. Press and hold the SEL key until the meter enters programming mode.
Display will read InPUt.
3. Press the RST key.
Display will read InPUt A-b.
4. Press the SEL key to enter count mode.
5. Press the SEL key again to enter decimal point setup.
6. Press the RST key if you wish to program the decimal point and set the number of decimals.

Note *MVP recommends no more than 2 decimal places.*

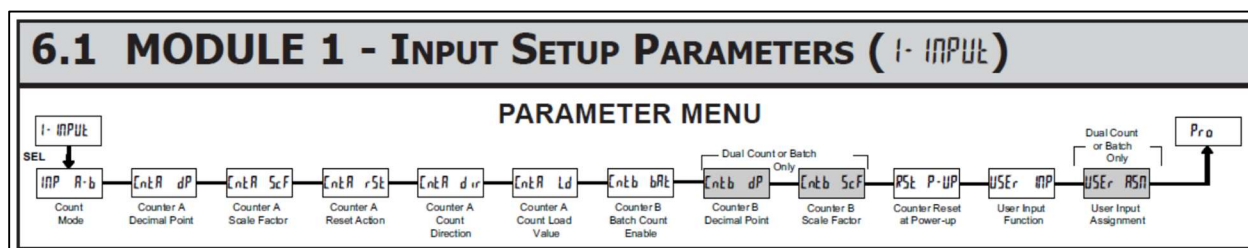

7. Press the SEL key to move the scale factor parameter.
8. Press the RST key if you wish to set the scale factor.
9. Use the SEL key to move from number to number and the RST key to adjust the number to 1.0000.

Note *This is to prepare the unit for calibration. If you already know your scale factor, enter that number.*

10. Continue pressing the SEL key to cycle through the remaining modules (6 times) until the display reads Pro or No.

Note *You have access to other parameters in input setup, but it is best practice to leave the default settings according to the table below.*

Parameter	Display	Default Setting
Counter A Reset Action	CntA-rSt	ZEro
Counter A Count Direction	CntA-dir	NOr
Counter A Count Load Value	CntA-Ld	50.00 Note <i>This setting has no bearing on this programming</i>
Counter B Batch Count Enable	Cntb-bAt	NO
Counter Reset at Power-Up	RST P-UP	NO
User Input Function	Usr-InP	rESET

11. Press SEL one more time to exit programming mode.

Calibrating

1. Navigate to the scale factor on all displays and set to 1.0000, if not already set.
2. Exit programming mode.
3. Reset all counters.
4. Dispense material into an appropriate container.

Note *If you use volume to determine your measurement, make sure your container has volumetric marks.*

5. When the container is filled appropriately, record the display reading.
6. Measure the dispensed material and divide either the net weight or the volume of the material by the number on the monitor display.

Example *Dispensed material weighs 12.50 lbs. Monitor displayed weight is 8.56 lbs.*

$12.50/8.56 = 1.46$. Enter 1.460 into the scale factor setting for each monitor.

7. Enter the answer to the equation as the scale factor in each monitor.
8. Exit programming mode.
The display changes to the correct weight.
9. Verify the scale factor by resetting all counters and dispensing again, then checking the measurement and displayed value.
10. If the reading has a large variance, repeat calibration.
11. If there is only a small variance, manipulate the scale factor until the display is correct.

Troubleshooting

System Troubleshooting		
Symptom	Possible Cause	Remedy
No power when switch is turned on	Blown fuse	Check fuse inside panel and replace as needed
No totals on display	Scale factor not set	Verify proper scale factor
	Sensor light broken	Verify sensor light is going on and off with magnet reads
	Sensor cable broken	Replace sensor cable
Remote reset not working	Sensor cable broken	Replace sensor cable
Displays read differently upon calibration	Different scale factors entered in displays	Verify the scale factor is the same for each display
Scale factor has to be adjusted way out of range from initial entry or constantly adjusted	Double counts from magnet	Inspect proximity switch LED to ensure that only 1 count per magnet is being detected
	Magnet out of place	Inspect the mag rod to ensure that all magnets are in place
	Head of switch too near or far from magnet (should be approximately 4 mm)	Adjust as necessary
	Pumps worn or damaged	Inspect pumps for wear or feed issues
Test shots not matching counter	Scale factor not set	Adjust scale factor
	Pumps worn or damaged	Inspect pumps for wear or feed issues


Parts Information


Full Unit Assemblies	
Part Number	Description
CB-8000-APS	FOR USE WITH APS PUMP SYSTEMS
CB-8000-UPS	FOR USE WITH UPS PUMP SYSTEMS
CB-8000-PAT	FOR USE WITH PATRIOT PUMP SYSTEMS
Note All system assemblies come with 25' resin sensor cable and 50' remote reset as standard. If longer lengths are needed they must be ordered separately.	
Displays	
Part Number	Description
E-CRM-103	2.250" DISPLAY (LD2006P0)
E-CRM-102	0.541" DISPLAY (CUB5)


Resin Sensor Mounts	
Part Number	Description
CSD-1000-APS	APS PUMP SYSTEM (NO SENSOR)
CSD-1000-UPS	UPS PUMP SYSTEM (NO SENSOR)
PAT-BRKT-SM	PATRIOT PUMP SYSTEM (NO SENSOR / BOLTS)
PAT-SENS-200	RESIN SENSOR WITH MOUNTING BOLTS
Sensors	
Part Number	Description
APS-1025	APS/UPS SENSOR
E-SEN-102-MLC	PATRIOT SENSOR
Cables	
Part Number	Description
CB-CABLE-5	5' EXTENSION SENSOR CABLE
CB-CABLE-25	25' EXTENSION/SENSOR CABLE
CB-CABLE-50	50' EXTENSION/SENSOR CABLE
CB-CABLE-SP	SPLITTER FOR DUAL RESETS
Reset Buttons	
Part Number	Description
CB-RST-100	GUN MOUNTED RESET BUTTON (RUBBERIZED)
CB-RST-200	WALL MOUNTED RESET BUTTON
Note <i>In order to use the CB-RST-200 to reset the lower display, the CB-CABLE-SP must be used.</i>	


The following parts illustrations are included for your reference:

- Wiring schematic drawings
- CSD-1000-HV
- CSD-1000-UPS
- CSD-1000-APS
- PAT-SENS-200

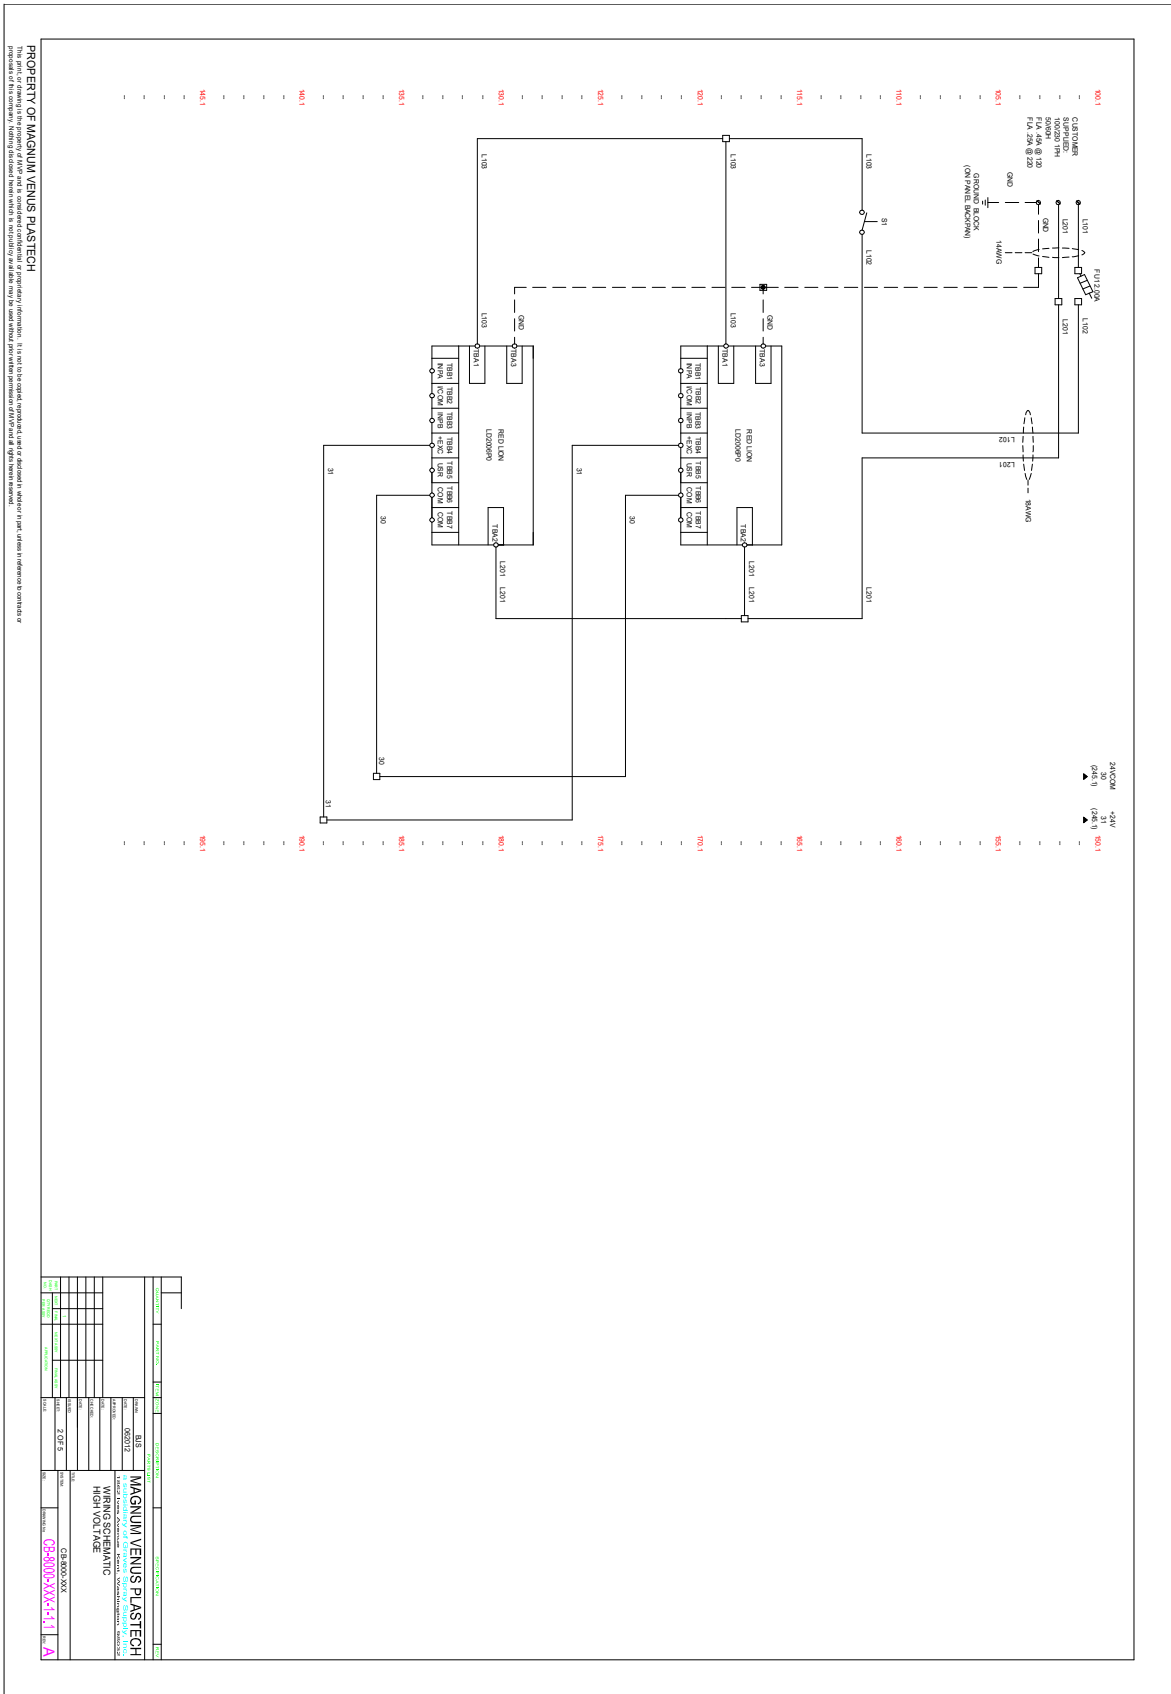

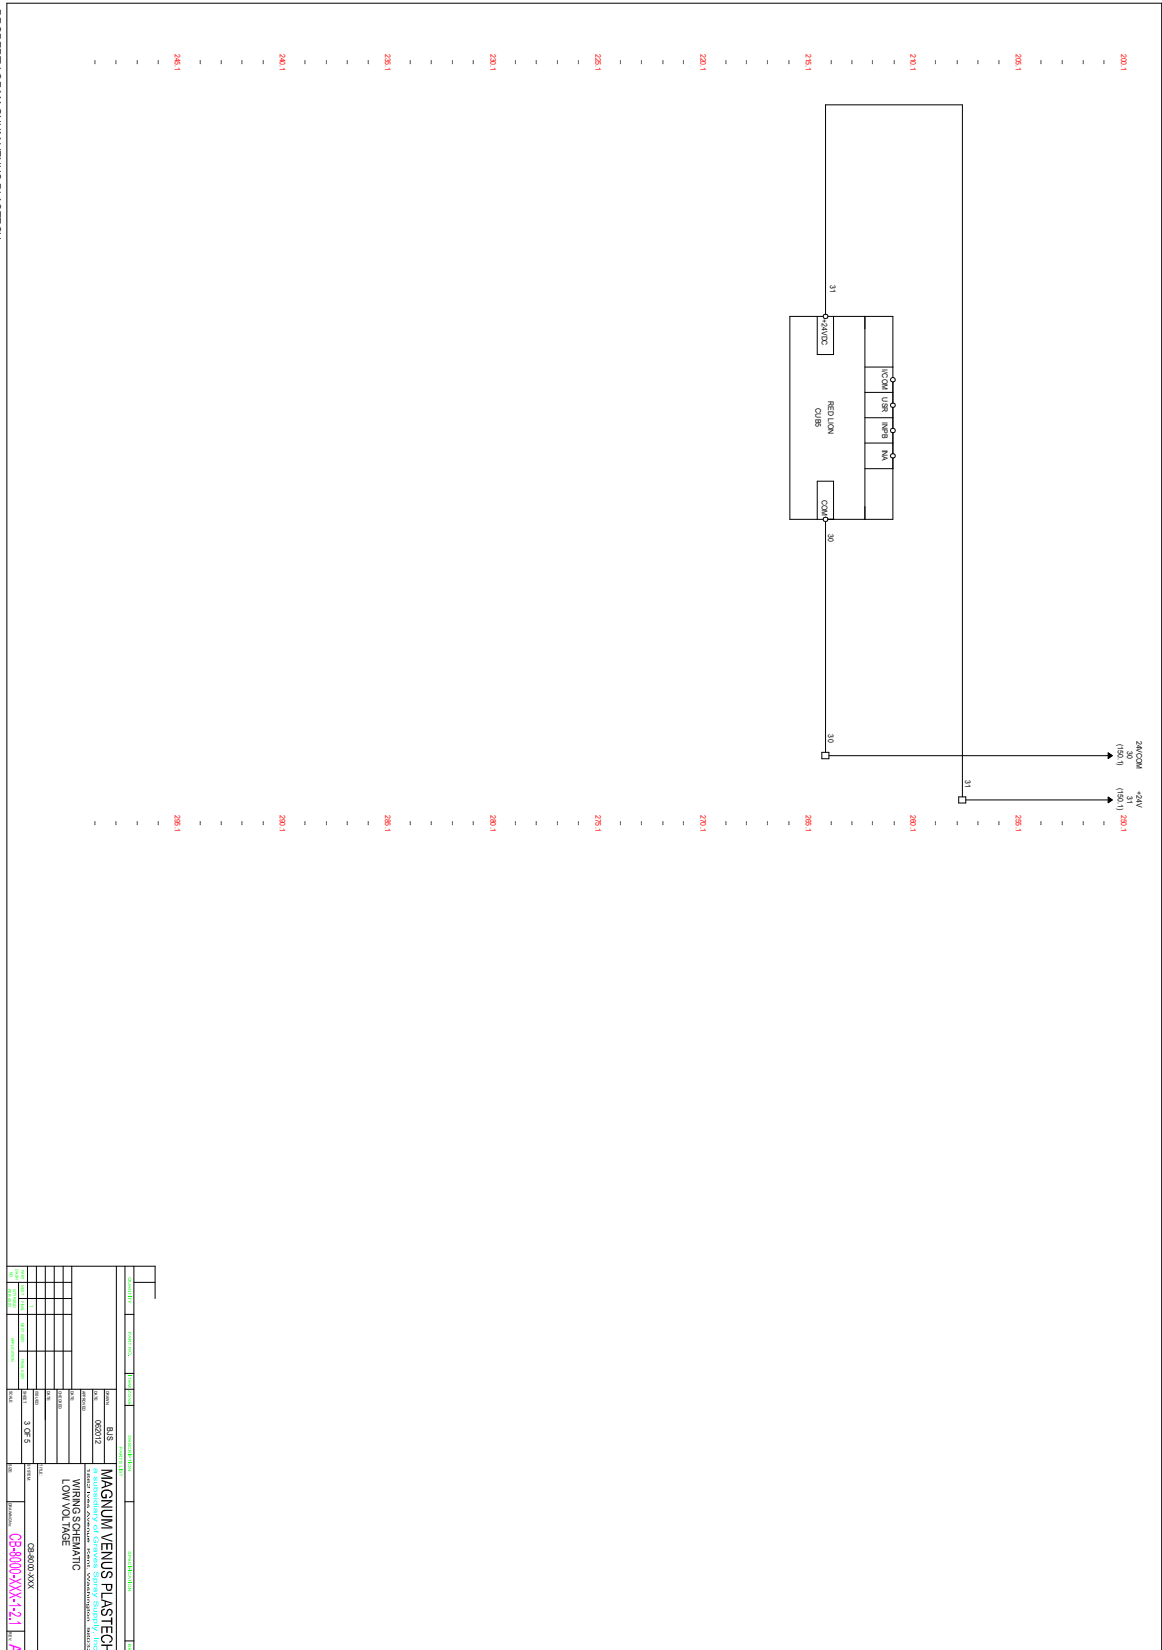

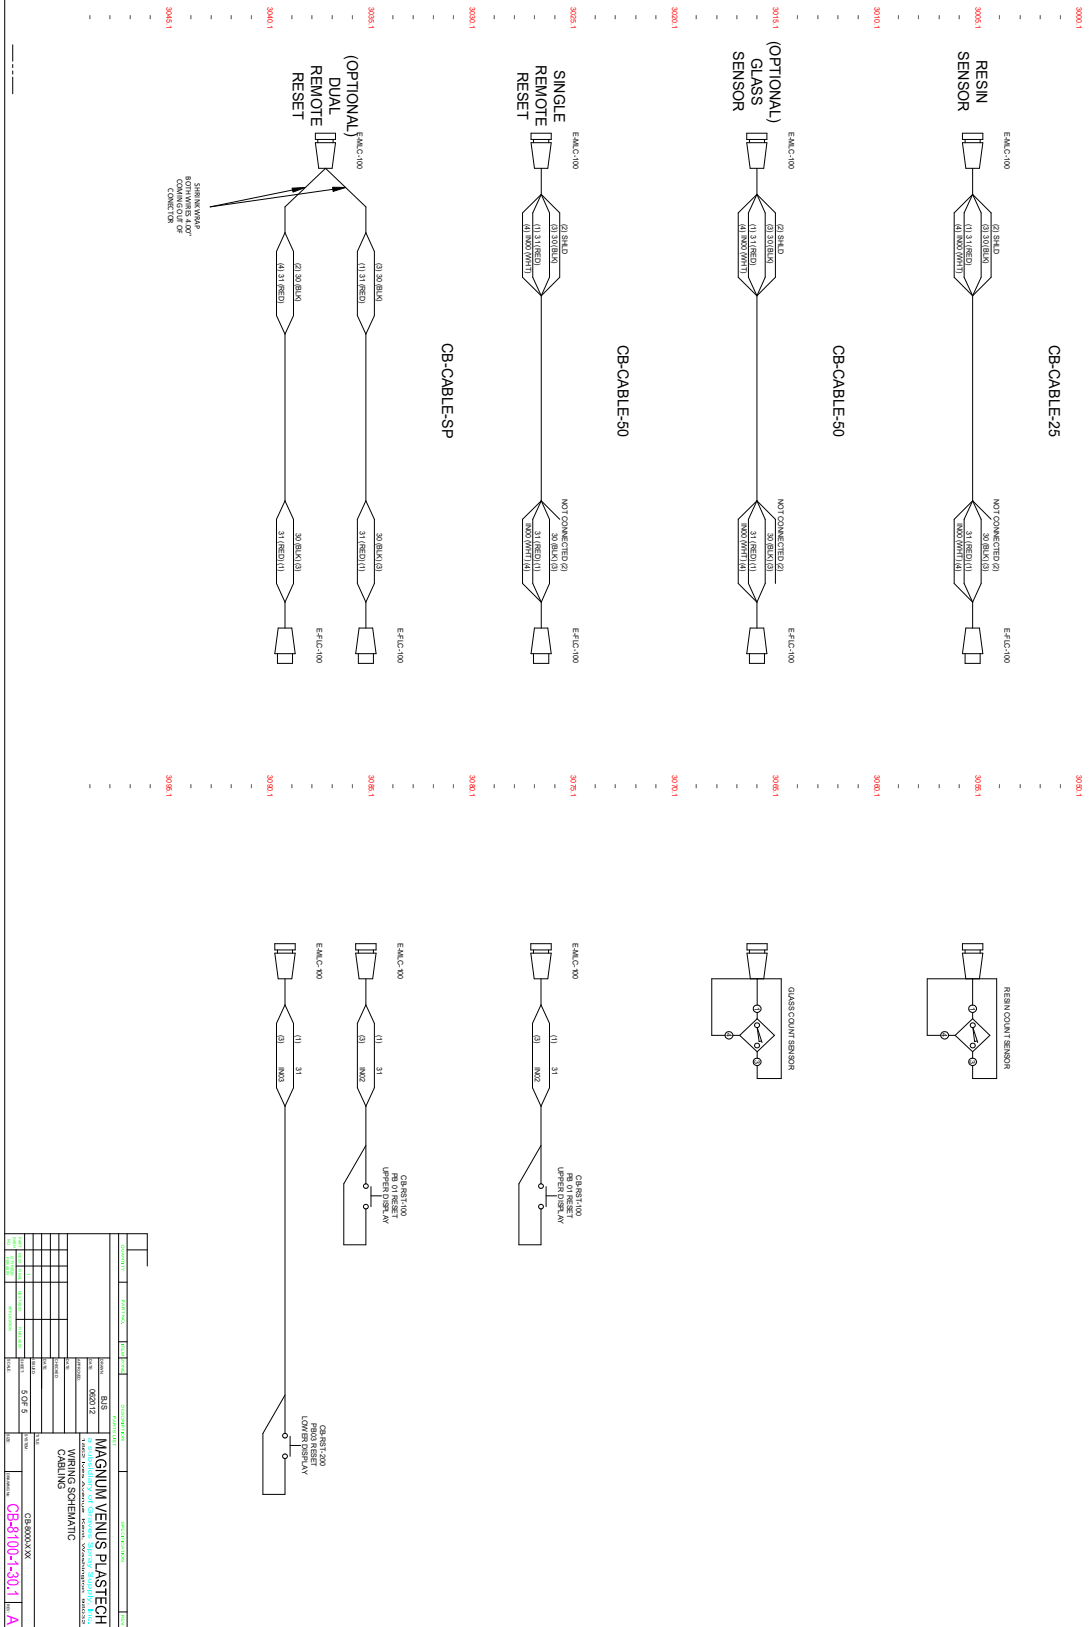

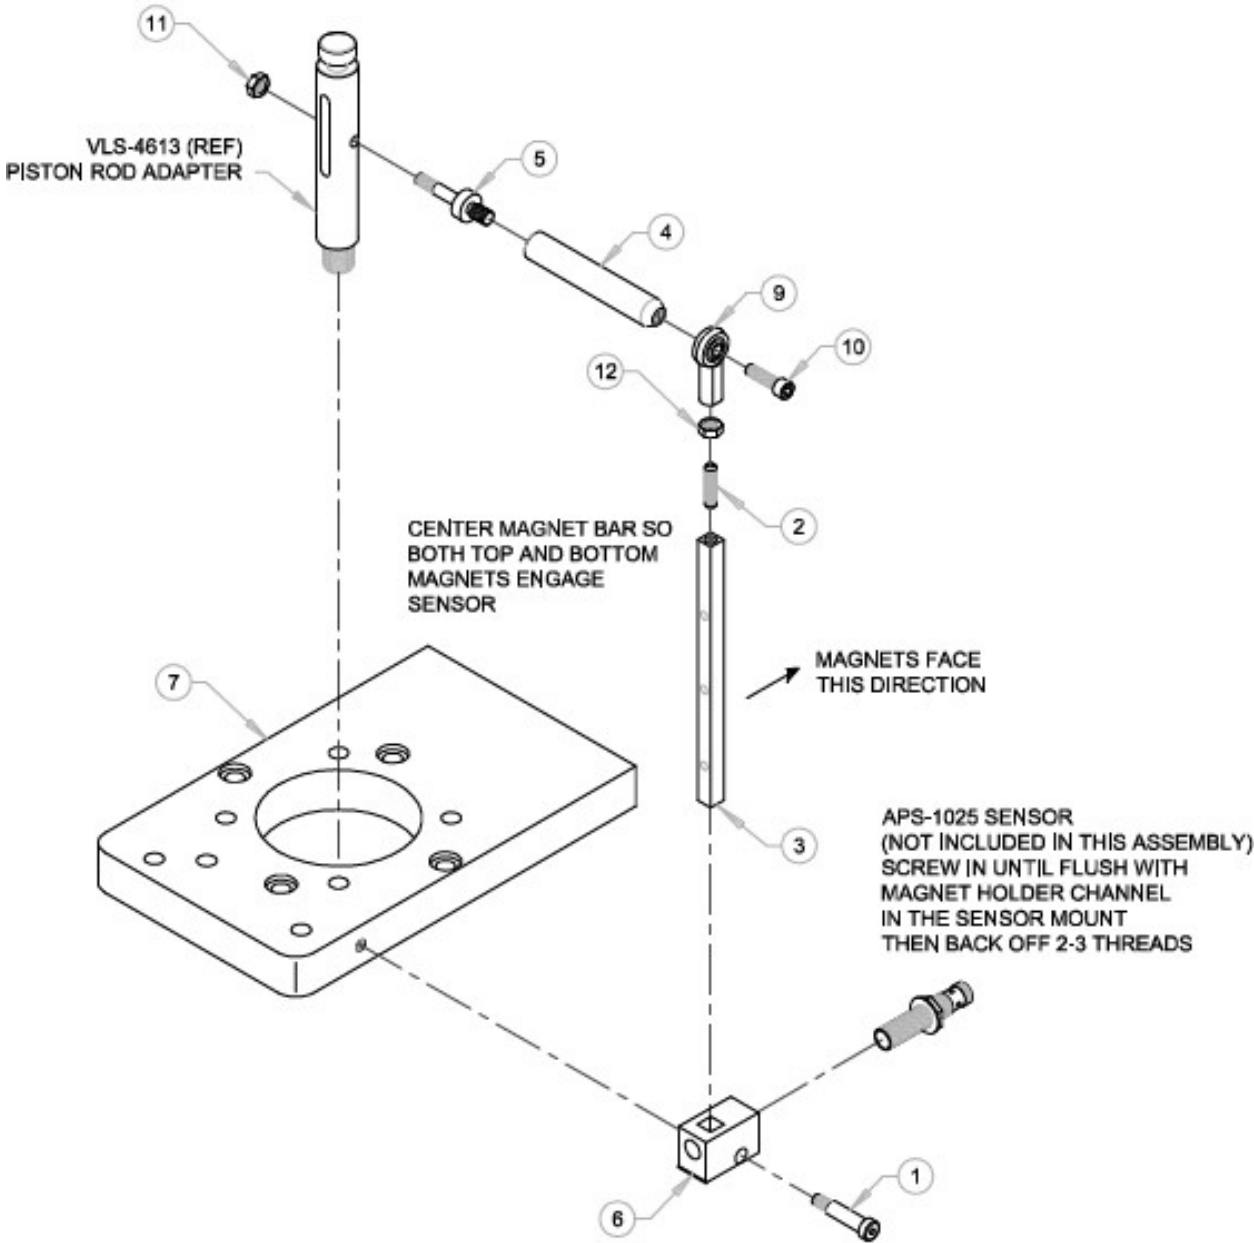

MAGNUM VENUS PLASTECH

Hardware Kit - HVLS Resin Sensor

CSD-1000-HV

REV. 09-18-07 BT2
REV. A - ADDED APS-1025 AND NOTE TO ILLUSTRATION 02-07-13 BT2


Hardware Kit - HVLS Resin Sensor CSD-1000-HV


PARTS LIST

ITEM	PART NO.	QTY	DESCRIPTION
1	02670-8	1	SHOULDER BOLT
2	7102-15-16	1	SET SCREW
3	CSD-1002	1	ASSY - MAGNET HOLDER
4	CSD-1003-UPS	1	CONNECTING ROD
5	CSD-1004-UPS	1	PIN - CAT SENSOR MNT
6	CSD-1005-M12	1	SENSOR MOUNT
7	HVLS-1002-CSD	1	MODIFIED PUMP PLATE
9	CSD-1008	1	ROD END
10	F-CS-04C-12	1	SOCKET HEAD CAP SCREW
11	F-HN-04C	1	HEX NUT
12	F-HN-04F	1	HEX NUT

OPTIONAL PARTS AND ASSEMBLIES

ITEM	PART NO.	QTY	DESCRIPTION
6A	CSD-1005-M8	1	SENSOR MOUNT
8	CSD-1007	3	MAGNET
	APS-1025		PROXIMITY SENSOR

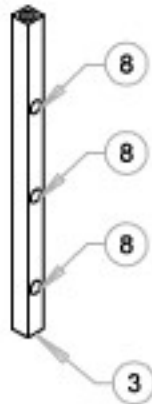

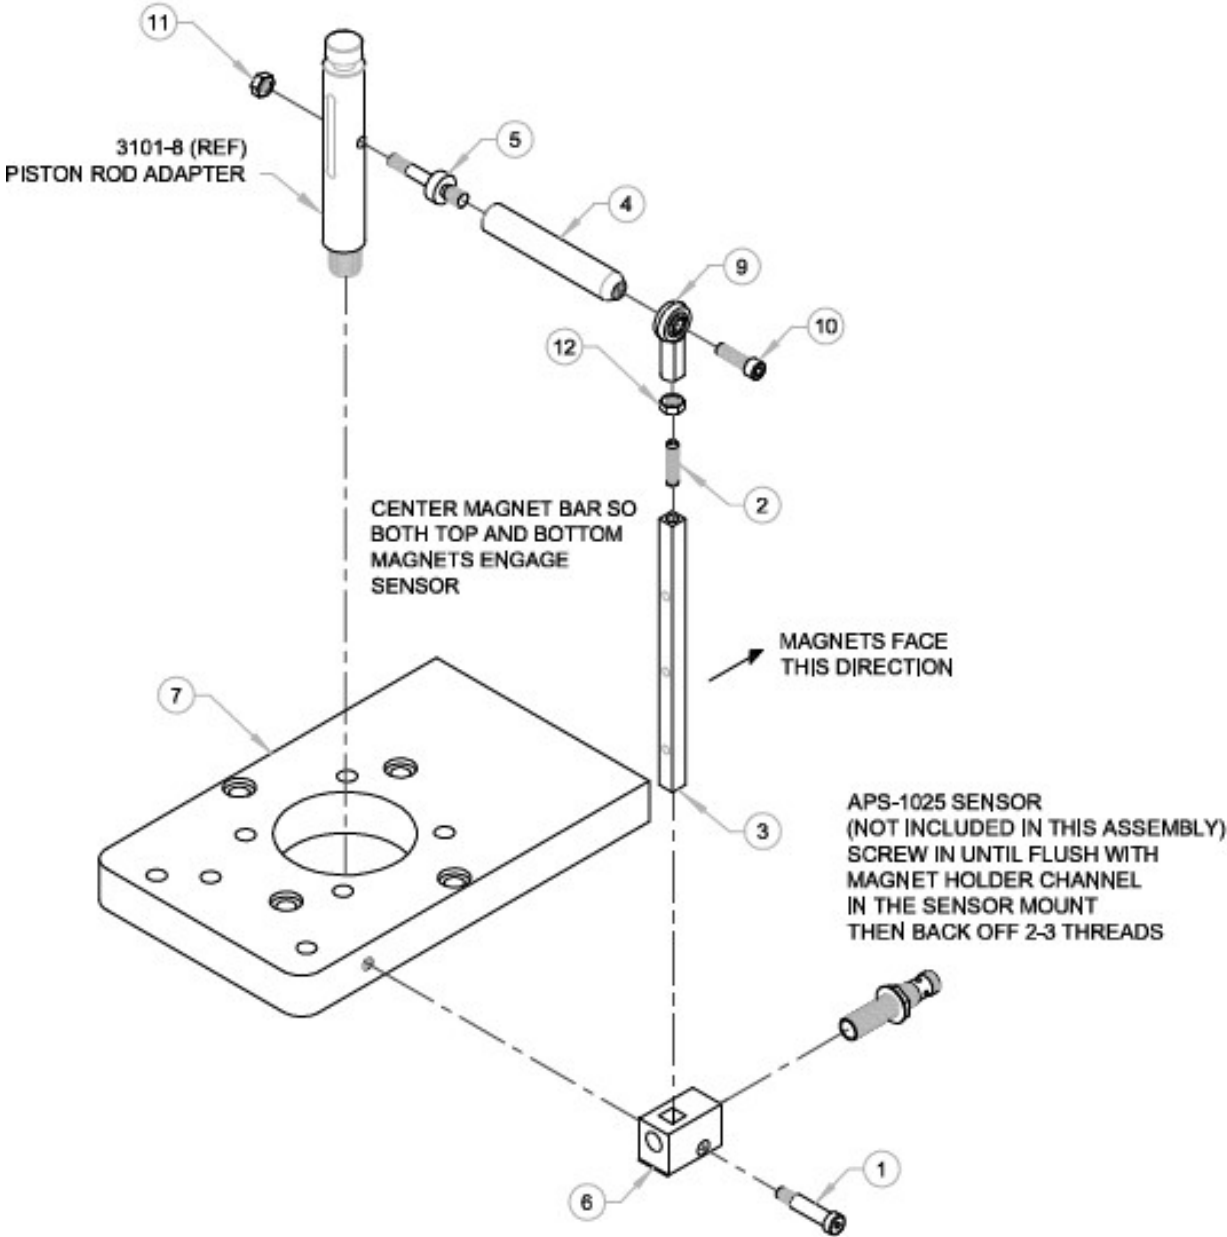

MAGNUM VENUS PLASTECH

Hardware Kit - UPS Resin Sensor

CSD-1000-UPS

REV. A - UPDATED KIT DESCRIPTION 06-21-06 BT2
REV. B - ADDED ITEM 8 TO ITEM 3, MOVED ITEM 8 TO OPTIONAL PARTS 06-29-06 JEM
REV. C - ADDED APS-1025 AND NOTE TO ILLUSTRATION 02-07-13 BT2


Hardware Kit - UPS Resin Sensor CSD-1000-UPS


PARTS LIST

ITEM	PART NO.	QTY	DESCRIPTION
1	02670-8	1	SHOULDER BOLT
2	7102-15-16	1	SET SCREW
3	CSD-1002	1	ASSY - MAGNET HOLDER
4	CSD-1003-UPS	1	CONNECTING ROD
5	CSD-1004-UPS	1	PIN - CAT SENSOR MNT
6	CSD-1005-M12	1	SENSOR MOUNT
7	CSD-1006	1	MODIFIED PUMP PLATE
9	CSD-1008	1	ROD END
10	F-CS-04C-12	1	SOCKET HEAD CAP SCREW
11	F-HN-04C	1	HEX NUT
12	F-HN-04F	1	HEX NUT

OPTIONAL PARTS AND ASSEMBLIES

ITEM	PART NO.	QTY	DESCRIPTION
6A	CSD-1005-M8	1	SENSOR MOUNT
8	CSD-1007	3	MAGNET

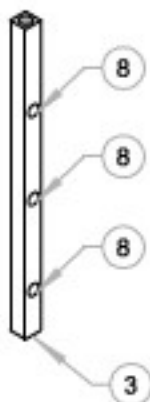

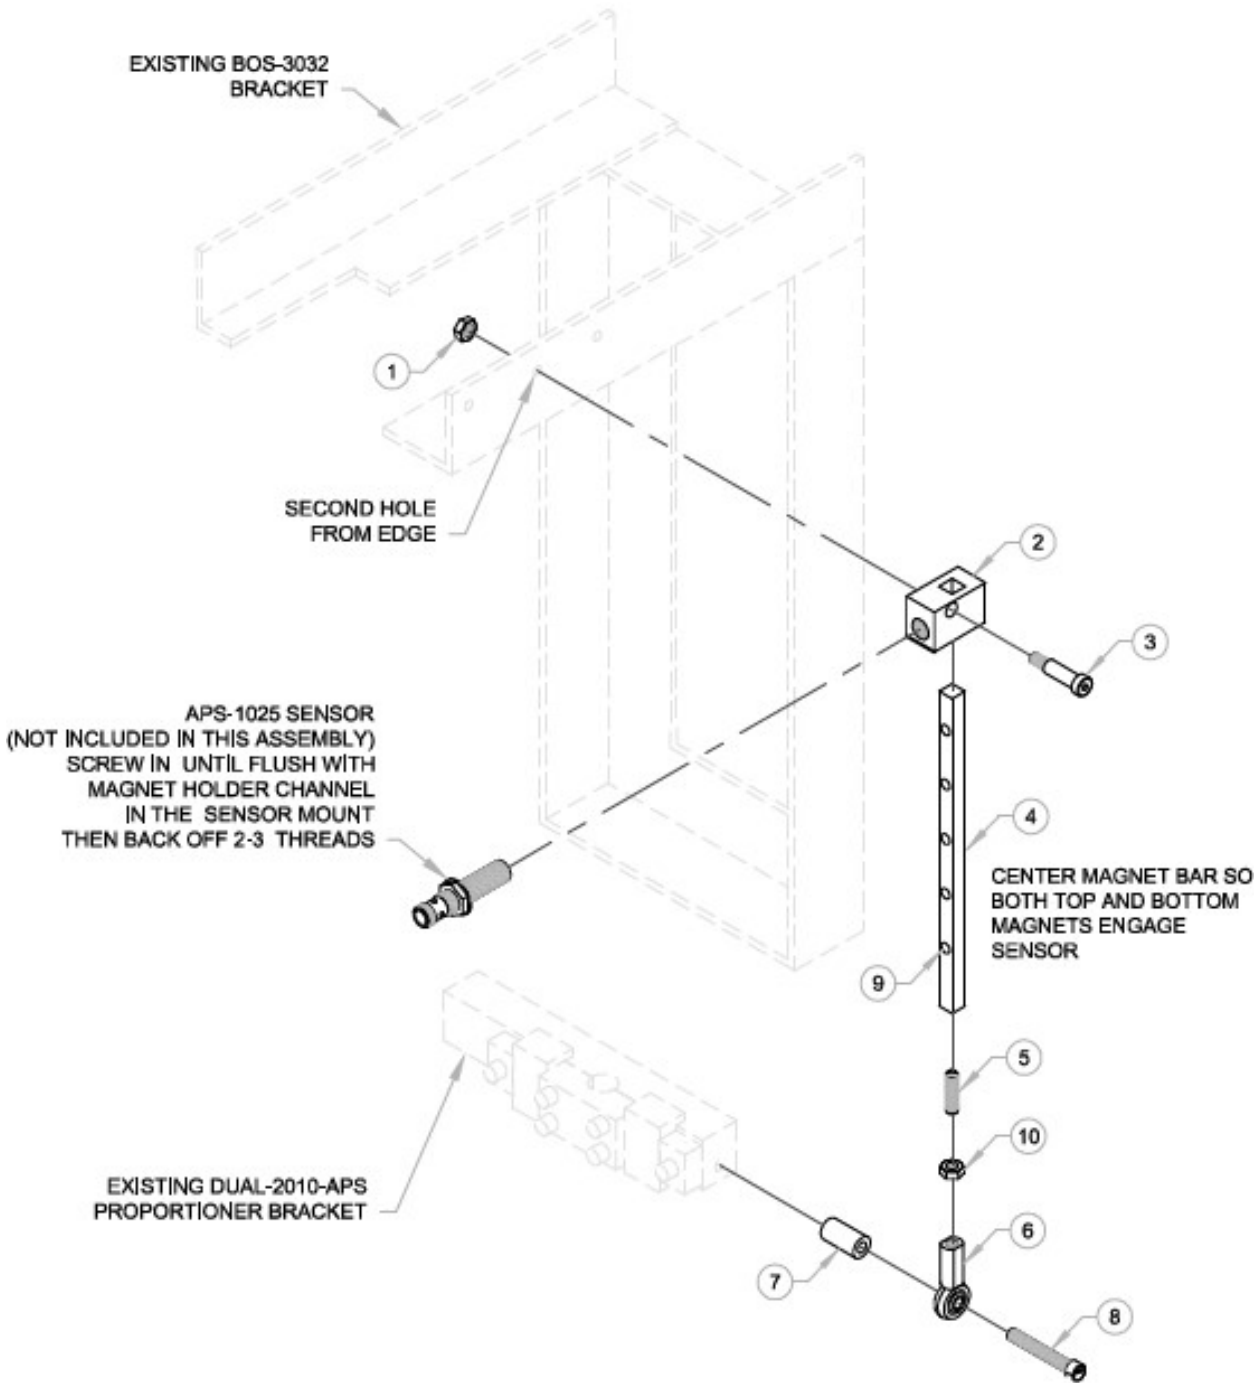

MAGNUM VENUS PLASTECH

Hardware Kit - APS Resin Sensor

CSD-1000-APS


REV. 08-25-06 BT2
 REV. A - ITEM 1 WAS QTY. 2, ADDED ITEM 10 04-24-07 BT2
 REV. C - ADDED BUBBLE I.D. FOR ITEM 9 12-09-09 BT2
 REV. D - ADDED APS-1025 AND NOTE TO ILLUSTRATION, ITEM 3 WAS F-SB-05-14 02-07-13 BT2

Hardware Kit - APS Resin Sensor CSD-1000-APS**PARTS LIST**

ITEM	PART NO.	QTY	DESCRIPTION
1	F-JN-04C-SS	1	JAM NUT
2	CSD-1005-M12	1	SENSOR MOUNT
3	F-SB-05-14	1	SHOULDER BOLT
4	CSD-1002-APS	1	MAGNET HOLDER
5	7102-15-16	1	SET SCREW
6	CSD-1008	1	ROD END
7	CSD-1010	1	SPACER
8	F-CS-04C-28	1	CAP SCREW
10	F-HN-04F-SS	1	HEX NUT

OPTIONAL PARTS AND ASSEMBLIES

ITEM	PART NO.	QTY	DESCRIPTION
9	CSD-1007	5	MAGNET
	APS-1025		PROXIMITY SENSOR

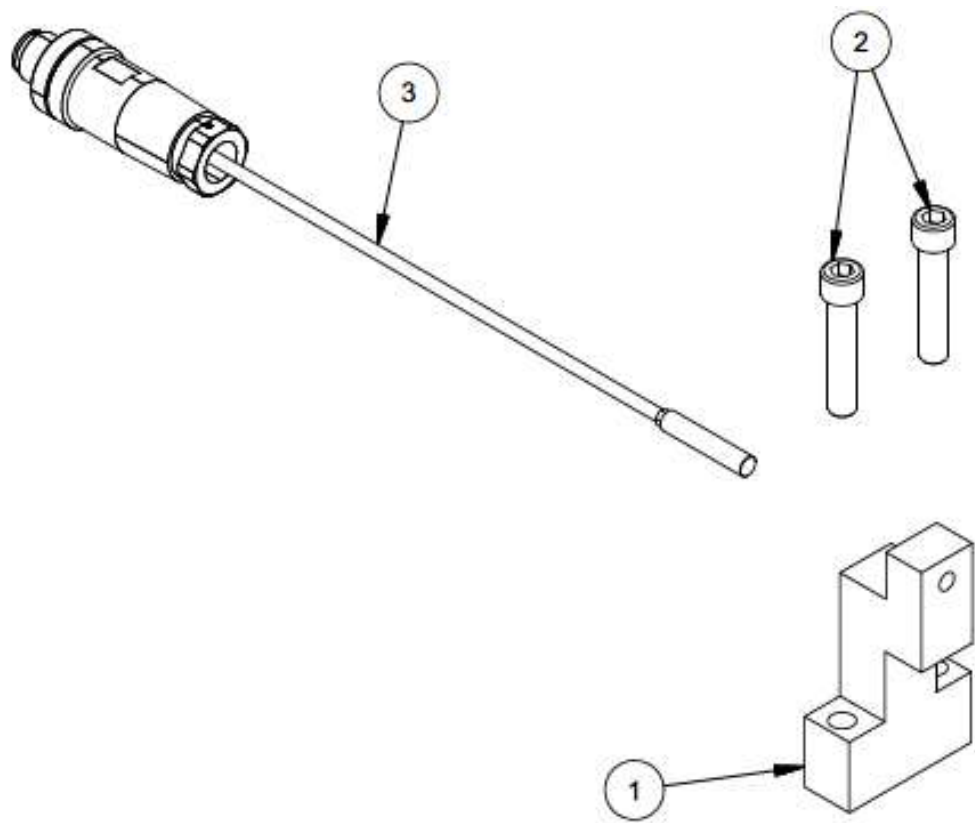

MAGNUM VENUS PLASTECH

SENSOR ASSEMBLY

PAT-SENS-200

REV:

SHEET 1 / 2

4/9/2015

Parts List			
ITEM	PART NUMBER	QTY	DESCRIPTION
1	PAT-BRKT-SM	1	SENSOR BRACKET
2	F-CS-04C-20	2	SOCKET HEAD CAP SCREW
3	E-SEN-102-MLC	1	5 MM PROX SWITCH WITH PLUG

MAGNUM VENUS PLASTECH

SENSOR ASSEMBLY

PAT-SENS-200

REV:

SHEET 2 / 2

4/9/2015



CORPORATE HEADQUARTERS

2030 Falling Waters Rd, Suite 350, Knoxville, TN 37922 · USA · Tel: (865) 686-5670

DISTRIBUTION AND PURCHASING

642 Barbrow Ln, Knoxville, TN 37932 · USA · Tel: (865) 684-4416

TECHNOLOGY CENTER AND MANUFACTURING

1862 Ives Ave, Kent, WA 98032 · USA · Tel (253) 854-2660 · Fax (253) 854-1666

E-mail: info@mvpind.com

For a list of international distributors, visit our website at :

www.mvpind.com/mvp-international